


Performance curve


ISO9906 Annex A 2900rpm

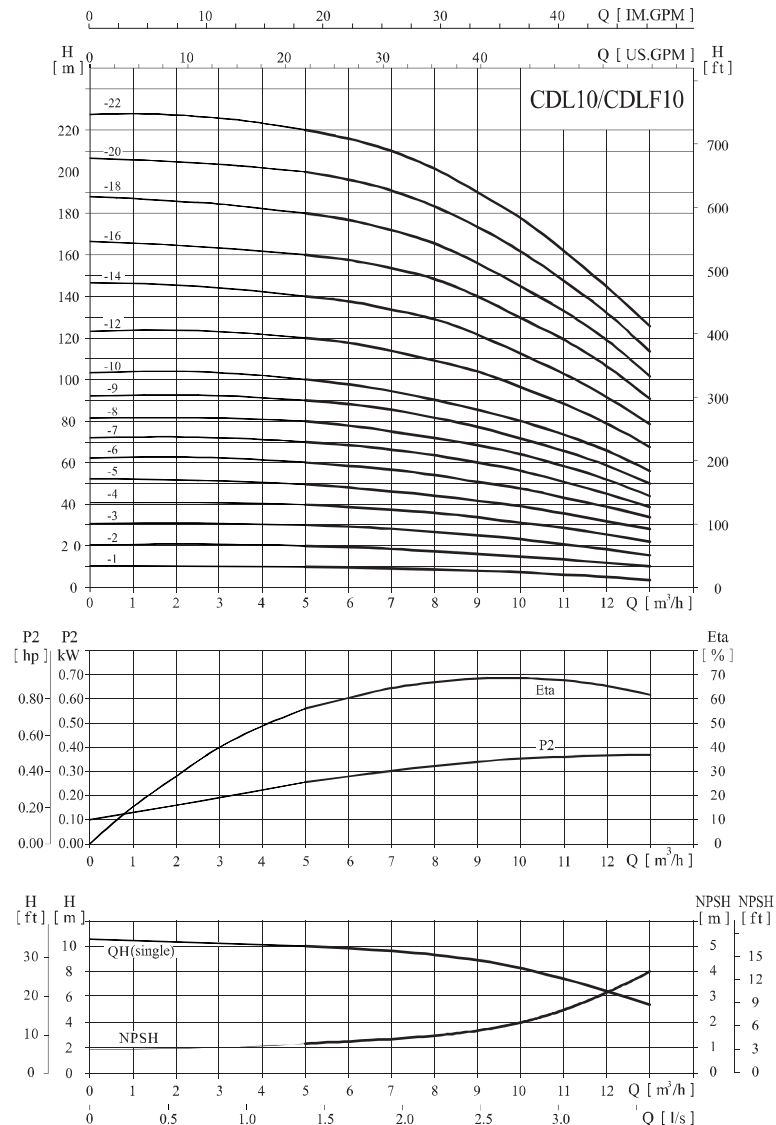

Performance table

Model	Driving motor		Q (m³/h)	5	6	7	8	9	10	11	12	13
	(kW)	(hp)										
CDL10-1	0.75	1	H (m)	9.7	9.3	8.9	8.3	7.7	7	6	5	4
CDL10-2	0.75	1		19.5	19	18	17	16	15	13.5	11.5	10
CDL10-3	1.1	1.5		29.5	29	28	27	25	23	21	18	16
CDL10-4	1.5	2		39.5	38.5	37.5	36	34	31	28	25	22
CDL10-5	2.2	3		49.5	48.5	47	44	42	39	35	32	28
CDL10-6	2.2	3		60	58	56	54	51	48	43	39	34
CDL10-7	3	4		70	68	66	63	60	56	51	45	39
CDL10-8	3	4		80	78	75	73	69	64	58	52	44
CDL10-9	3	4		90	87	85	81	77	72	66	58	50
CDL10-10	4	5.5		100	97	95	90	85	80	74	66	56
CDL10-12	4	5.5		120	117	114	109	104	96	89	79	68
CDL10-14	5.5	7.5		140	137	134	129	122	113	103	92	79
CDL10-16	5.5	7.5		160	158	153	148	140	129	119	106	91
CDL10-18	7.5	10		180	177	172	166	156	145	133	119	102
CDL10-20	7.5	10		200	196	191	184	173	162	147	132	114
CDL10-22	7.5	10		220	216	210	202	190	178	162	145	126

Installation sketch

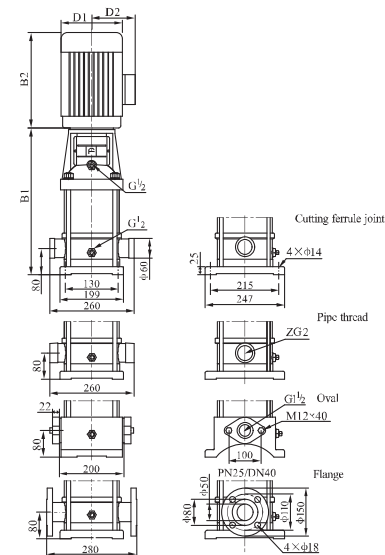

Size and weight

Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
CDL10-1	347	245	592	170	142	40
CDL10-2	347	245	592	170	142	41
CDL10-3	377	245	622	170	142	43
CDL10-4	417	290	707	190	155	49
CDL10-5	447	290	737	190	155	53
CDL10-6	477	290	767	190	155	54
CDL10-7	517	345	862	197	165	64
CDL10-8	547	345	892	197	165	65
CDL10-9	577	345	922	197	165	66
CDL10-10	607	355	962	230	188	74
CDL10-12	667	355	1022	230	188	76
CDL10-14	747	390	1137	260	208	100
CDL10-16	807	390	1197	260	208	102
CDL10-18	867	390	1257	260	208	107
CDL10-20	927	390	1317	260	208	109
CDL10-22	987	390	1377	260	208	111

CDL10-16~10-22 sub-connection of pipeline has no oval flange connection.

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.