


Performance curve


ISO9906 Annex A 2900rpm

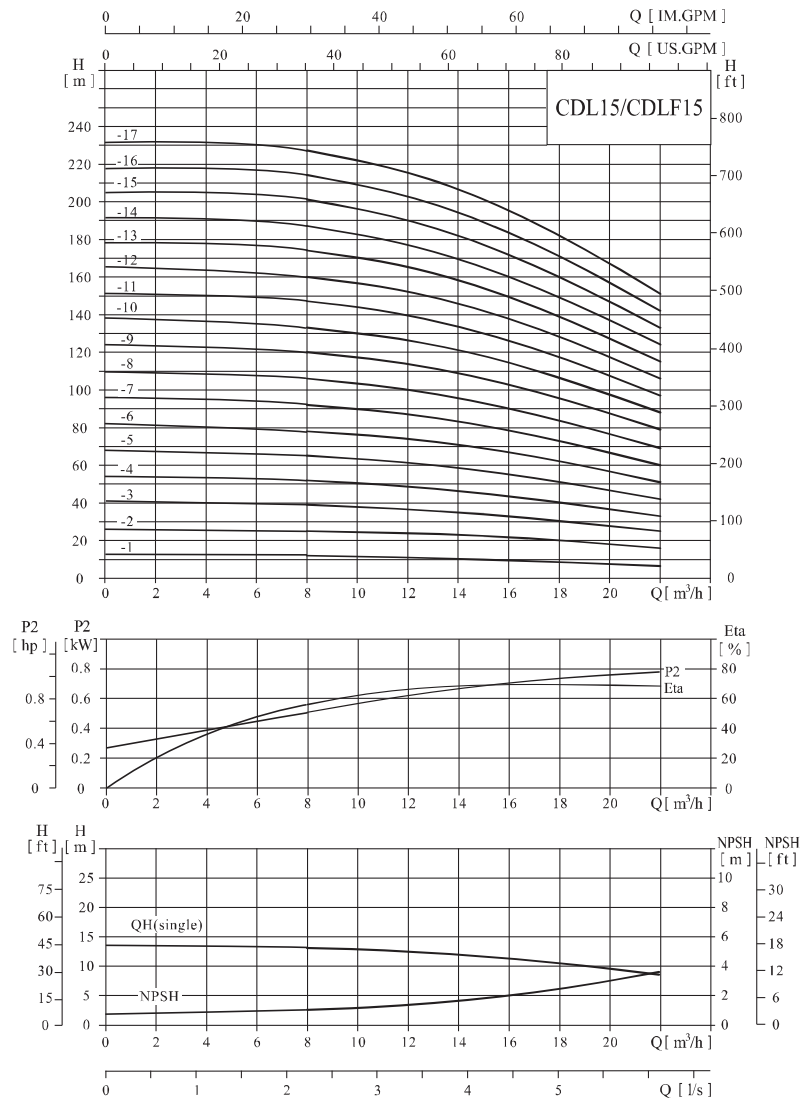

Performance table

Model	Driving motor		Q	8	10	12	14	15	16	18	20	22
	(kW)	(hp)	(m³/h)									
CDL15-1	1.1	1.5		12	11.5	11	10.5	10	9.5	8.5	7.5	6.5
CDL15-2	2.2	3		25	24.5	24	23	22.5	21.5	20	18	16
CDL15-3	3	4		39	38	37	35	34	33	30	28	25
CDL15-4	4	5.5		52	51	49	46	45	44	40	37	33
CDL15-5	4	5.5		65	63	61	59	57	55	51	47	42
CDL15-6	5.5	7.5		78	76	74	71	69	67	62	57	51
CDL15-7	5.5	7.5		92	90	87	83	81	79	73	67	60
CDL15-8	7.5	10		106	103	100	96	93	90	84	77	69
CDL15-9	7.5	10		120	117	114	109	106	103	95	87	79
CDL15-10	11	15		133	130	126	121	118	114	106	97	88
CDL15-12	11	15		160	157	152	146	142	138	128	117	106
CDL15-14	11	15		187	182	177	169	165	160	149	137	124
CDL15-17	15	20		227	222	215	206	201	195	182	167	151

Installation sketch

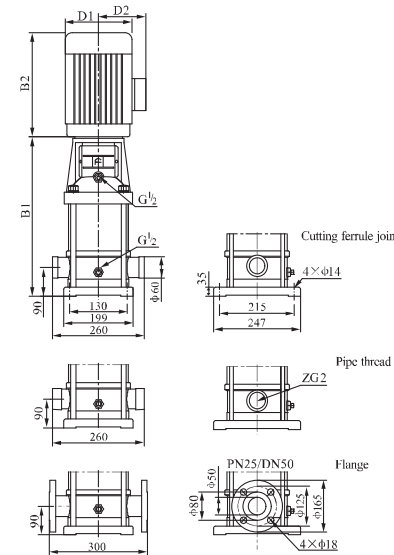

Size and weight

Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
CDL15-1	387	245	632	170	142	33
CDL15-2	397	290	687	190	155	42
CDL15-3	452	345	797	197	165	51
CDL15-4	497	355	852	230	188	60
CDL15-5	542	355	897	230	188	62
CDL15-6	607	390	997	260	208	78
CDL15-7	652	390	1042	260	208	80
CDL15-8	697	390	1087	260	208	86
CDL15-9	742	390	1132	260	208	88
CDL15-10	875	500	1375	330	255	157
CDL15-12	965	500	1465	330	255	161
CDL15-14	1055	500	1555	330	255	165
CDL15-17	1190	500	1690	330	255	178

The overall dimension of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.